

VORTEX™ PRO

LED HIGHBAY & LOWBAY 80W-200W

The all new Australian Made Vortex[™] is designed to replace conventional high bay lighting such as metal halide or induction lighting used in indoor and outdoor applications. The Vortex[™] is one of the most energy efficient LED high bay lights available in Australia. The stunningly beautiful design is based on the Vortex[™] cooling concept and the diffuse lens option provides a moon-like appearance with minimal glare.



COMMERCIAL & INDUSTRIAL LIGHTING









PRODUCT NAME	VORTEX™ PRO LED HIGHBAY					
PART NUMBER (STANDARD*)	VTX1-1-5-A-C*	VTX1-2-5-A-C*	VTX1-3-5-A-C*	VTX1-4-5-A-C*		
POWER CONSUMPTION	80W	120W	160W	200W		
LIGHT OUTPUT EFFECTIVE	13,204 lm	18,812 lm	23,873 lm	28,585 lm		
LED EFFICACY	165 lm/W	157 lm/W	149 lm/W	143 lm/W		
IP RATING	IP66					
OPERATING TEMP °C	-40°C to +50°C*					
NOMINAL VOLTAGE	230V/AC					
POWER FACTOR	>0.95					
THERMAL MANAGEMENT	Electronic Active/Continuous					
CRI	Typical 80+ CRI					
CCT/KELVIN	3000K, 4000K & 5000K**					
LED BIN SELECTION	3 SCDM Ellipses					
HOUSING	Die-Cast Aluminium					
FIXINGS	304 Stainless Steel					
LINE CURRENT (230V/AC)	0.35A	0.55A	0.70A	0.87A		
DRIVER	Internal	Internal	Internal	External		
LENS	PMMA or Polycarbonate					
CABLE TYPE	3pin Aust Moulded Plug					
CABLE LENGTH	3 Meters 1.8 Meters					
EXPECTED LIFESPAN	50,000 hours to 70% Brightness					
SURGE PROTECTION	10kV					
NET WEIGHT	7.5kg					
BOX DIMENSIONS	420x420x190mm					
EMC COMPLIANCE	AS/NZS CISPR15					
SAFETY COMPLIANCE	AS/NZS 60598.1					
WARRANTY	7 YEARS					



VORTEX™ PRO


LED HIGHBAY & LOWBAY 80W-200W



DESIGNED FOR

- ✓ WAREHOUSE AISLES
- ✓ POULTRY SHEDS
- ✓ RETAIL & DISTRIBUTION CENTRES
- ✓ WORKSHOPS
- ✓ MEZZANINES
- ✓ RETAIL STORES

TECHNICAL DRAWINGS

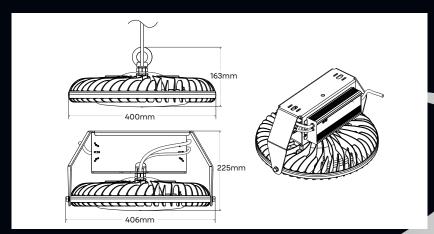

FEATURES



ENHANCED OPTICAL SUB-SYSTEM

28 Precision Optics for superior beam control.

HIGH EFFICACY LEDS


Luxeon 7070 LEDs by LUMILEDS, the global leader in light engine technology.

DURABLE ANTI-CORROSION FIXINGS

High Corrosion Resistant 304 Stainless Steel fixing. 18% chromium and 8% nickel.

UV STABLE OUTER LENS

Outer lens available in clear or diffuse (reduced glare) options.

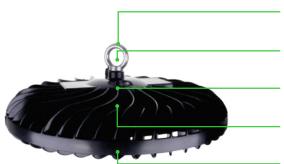

STAINLESS STEEL MOUNTING EYE

Bracket and ceiling mounting options are also available.

SILICONE MAINS CABLE

Resistance to extreme high and low temperature environments, -40°C to +50°C.

ULTRA RELIABLE LED POWER SUPPLY

High temperature electrolytic capacitors for extended power supply lifetime.

REFINED AESTHETICS

For use in both industrial and architectural applications.

CORROSION RESISTANT HOUSING

Low copper die cast passivated aluminium with durable epoxy Powder Coat.



VORTEXTM

LED HIGHBAY & LOWBAY 80W-200W





ORDERING EXAMPLE





MODEL	SERIES	CCT (KELVIN)	BEAM TYPE	LENS TYPE
VTX1 (VORTEX)	1 (80W LAMPS)	4 (4000K)	A (HIGHBAY)	C PMMA (CLEAR)
	2 (120W LAMPS)	5 (5000K)	B (HIGHBAY DIFFUSED)	D PMMA (DIFFUSED)
	3 (160W LAMPS)		C (HIGHBAY NARROW)	E PC (CLEAR)
	4 (200W LAMPS)		D (LOWBAY)	F PC (DIFFUSED)
			E (ULTRA WIDE)	
			F (AISLE)	

BEAM TYPE












200W CLEAR AISLE HIGHBAY 4000K





200W CLEAR HIGHBAY 5000K



200W DIFFUSE LOWBAY 5000K