




Beta5 Smart



IP65

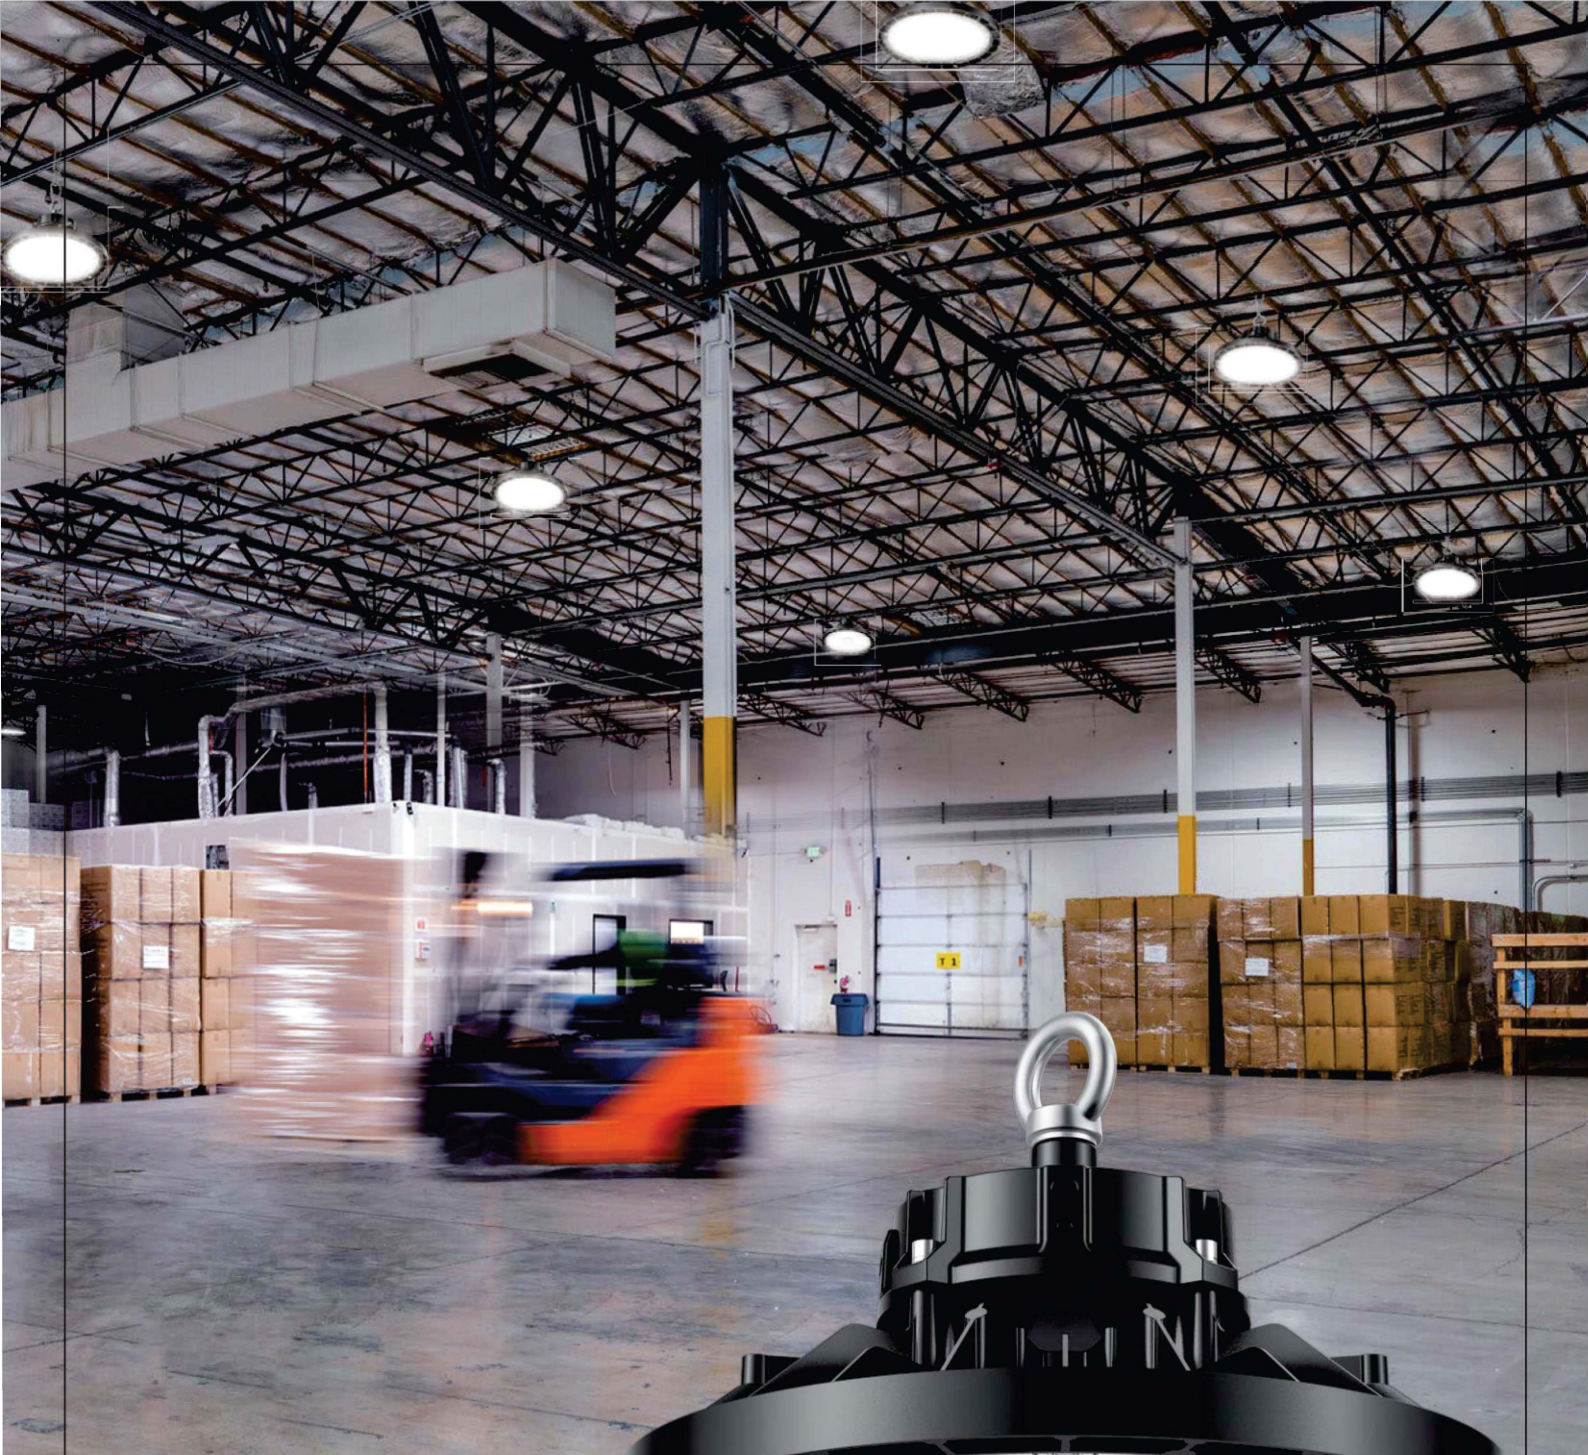

IK08



0-10V



Zhaga Base



PIR Sensor



Microwave
Sensor



Warranty

Intelligent Solution, More Energy-Saving

Twist central sensor making the high bay solution more energy-saving and with higher performance.



Zhaga Base


Zhaga base is optional to match different smart controllers.

B5S Specifications

Part Number:	B5B120-50VSDV2	B5B150-50VSDV2	B5B200-50VSDV2
Wattage Input	120W	150W	200W
Voltage	100-277Vac, SO/ 60 Hz	100-277Vac, SO/ 60 Hz	100-277Vac, SO/ 60 Hz
Luminous Flux	23,160lm	27,600lm	34,800lm
Lm/W	193m/W	184m/W	174m/W
Beam Angle	120°	120°	120°
Control (Optional)	Microwave Motion Sensor, PIR	Microwave Motion Sensor, PIR	Microwave Motion Sensor, PIR
CCT & CRI	5000K, 80CRI	5000K, 80CRI	5000K, 80CRI
Protection	IP65, IK08	IP65, IK08	IP65, IK08
Operating Temp	-30 °C to +50 °C	-30 °C to +50 °C	-30 °C to +50 °C
Warranty	5 Years	5 Years	5 Years



Photometric Diagrams

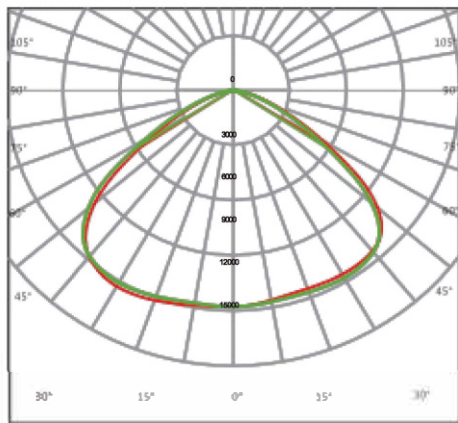

120 degree (std)

Mounting Options



Loop mounting



Ceiling mounting



Dura Vision Lighting Pty Ltd
1800 66 55 66
sales@ dura-vision.com.au